


E-IPA CARD IN E1-ANTENNA MODE

E-IPA CARD IN E1-ANTENNA MODE

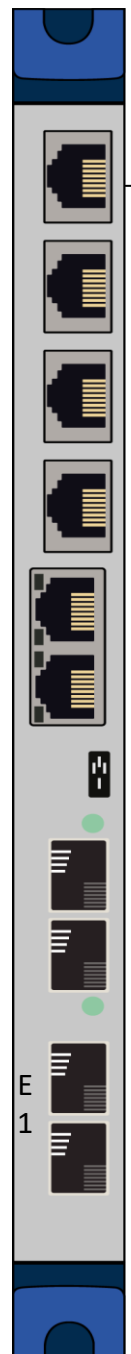


LAN#1 (ADMIN PORT)

SETUP IPA ADMIN LAN #1 IP ADDRESS AS PER NORMAL TO BE ON THE SAME SUBNET AS THE EHX PC

E-IPA CARD IN E1-ANTENNA MODE
REQUIRES EHX V12.1 OR LATER

USE FIBRE SFP FROM IPA CARD TO FSII SPL (SPLITTER) UNITS
THE CARD DOES NOT SUPPORT ANY OTHER FUNCTION EXCEPT E1 WIRELESS MODE
-NO IP PANEL , NO AGENT IC , NO IPT, NO AES67 AUDIO
THE IPA CARD MUST BE LICENCED TO 32 PORTS OR GREATER

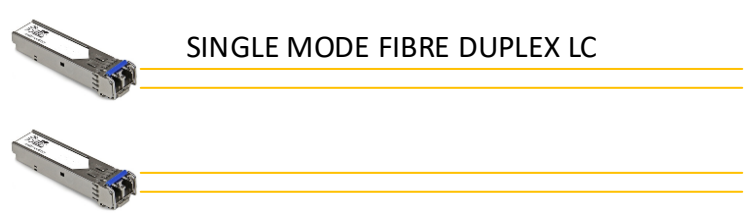

SINGLE MODE FIBRE DUPLEX LC

SFP -SINGLE MODE
CLEAR-COM PART # HLI-SMFO



FSII-SPL

CAT5E/ CAT6 CABLE



FSII-TCVR-19 OR TCVR-24

