




CONN 'A' (9W D SOCKET)

CONN 'B' (3 WAY HE13)

WIRING DETAILS FOR CONN A

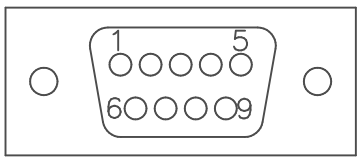

SOLDER BUCKET SIDE

FROM	TO
CONN A PIN 1	NC
CONN A PIN 2	CONN B PIN 1
CONN A PIN 3	CONN B PIN 2
CONN A PIN 4	NC
CONN A PIN 5	CONN B PIN 3
CONN A PIN 6	NC
CONN A PIN 7	NC
CONN A PIN 8	NC
CONN A PIN 9	NC

NOTES:
 1. SLEEVE SOLDER JOINTS.
 2. CABLE OVERALL LENGTH 2M±10MM
 2. THIS PART SHALL BE ROHS COMPLIANT (2002/95/EC), ALL MATERIALS, COMPONENTS, PLATING & PAINT USED IN ITS CONSTRUCTION TO BE ROHS COMPLIANT

A3 DO NOT SCALE

3rd ANGLE

All dimensions are in mm unless otherwise stated.
 Normal tolerance stated:
 No decimal places: ±1.0mm
 1 decimal place: ±0.3mm
 2 decimal places: ±0.1mm
 Unless otherwise stated.

This drawing/Specification is the property of VITEC GROUP COMMUNICATIONS and may not be reproduced or disclosed to a third party in any form without the written permission of the company.

REV	DATE	ECO	INIT	DESCRIPTION
1	19.11.07	4826	RPH	RELEASE

DRAWN BY RPH

Vitec Group Communications
www.clearcom.com

PART No	770106Z
FIRST USED ON	ECLIPSE PICO
DESCRIPTION	MVX-A16 INTERFACE CABLE

DATE	19.11.07
DRG.No.	770106Z-ASSY
REV	1
SHEET 1 OF 1	