WBS-670/680 Dummy Intercom Loads

Use when linking two stand alone base stations together

To IC PL connection

10 ufd / 50Vdc non polar

220 ohms

1

2 •NC

10k ohms

10k resistor used to bleed off call voltage signal from pin 3 (optional)

3
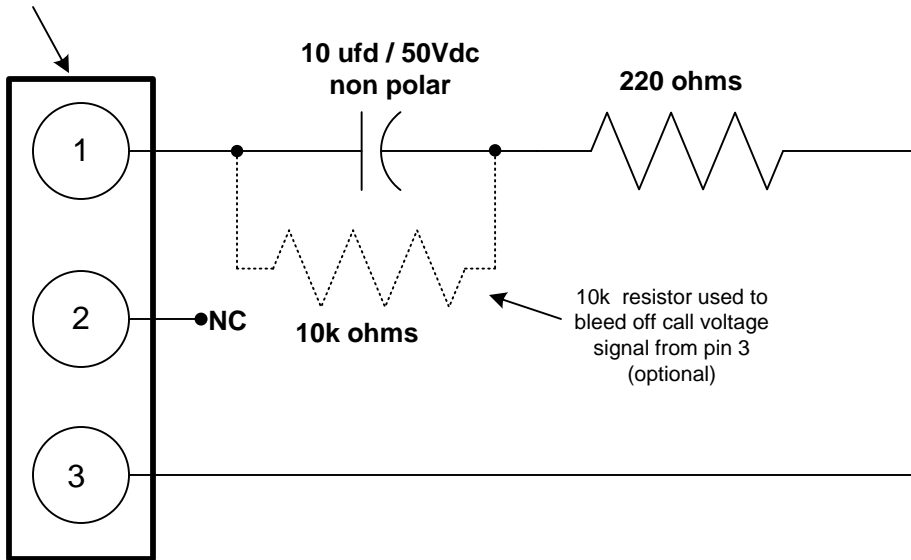
3 pin XLR connector

Clearcom pin outs

Pin 1 = Ground

Pin 2 = +28 Vdc

Pin 3 = Audio in/out

Clear-Com
COMMUNICATION SYSTEMS

TITLE: **WBS-670/680 IC loads**