
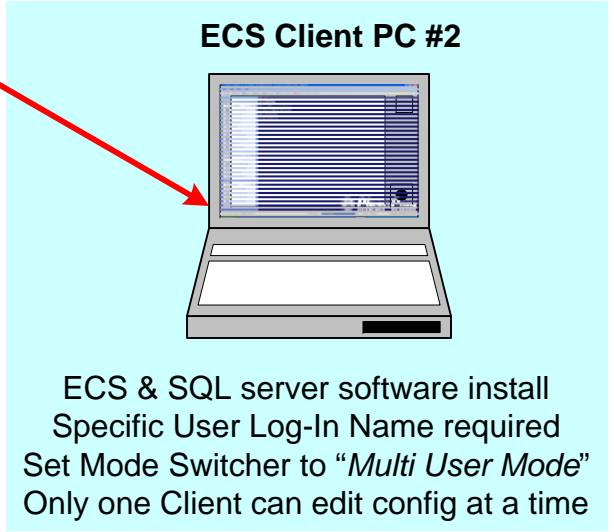
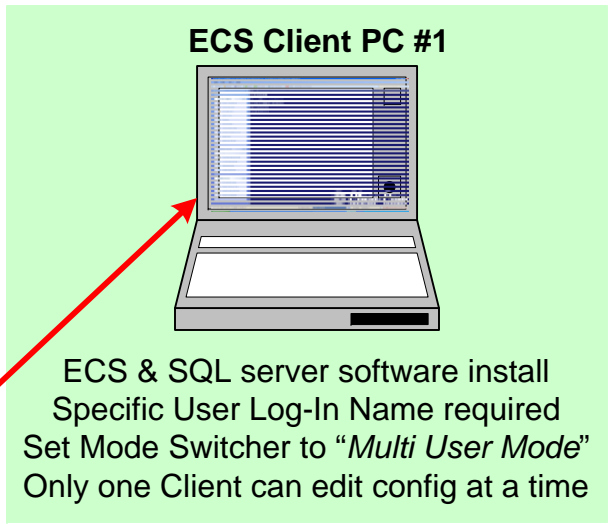


Linking between frames  
(fiber, CAT-5, or E1/T1)

LAN connection

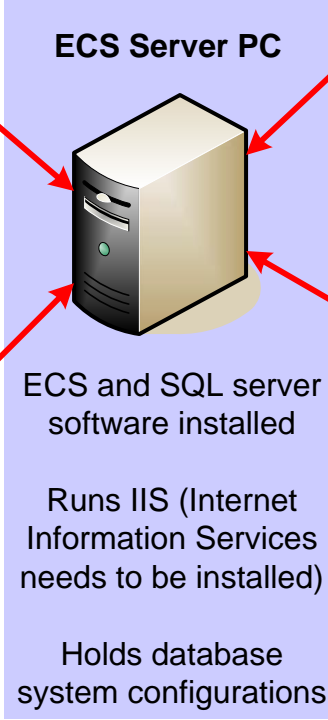

Client Server Mode requires only one client license key from the factory for all Client PCs on the network

See ECS 5.1.1 software manual chapter 11 (p/n 810299Z Rev 14) to install IIS on the server PC and ECS / SQL server software