





Clear-Com 4-Wire Intercom RJ45



Adapter Cable RJ45-M > 5pin XLR-F

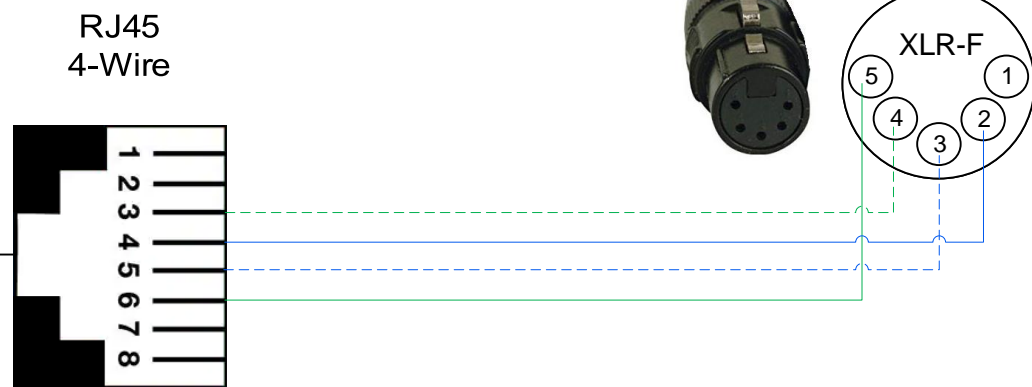

Grass Valley CopperHead 3404-Base 4-Wire Intercom 5pin XLR

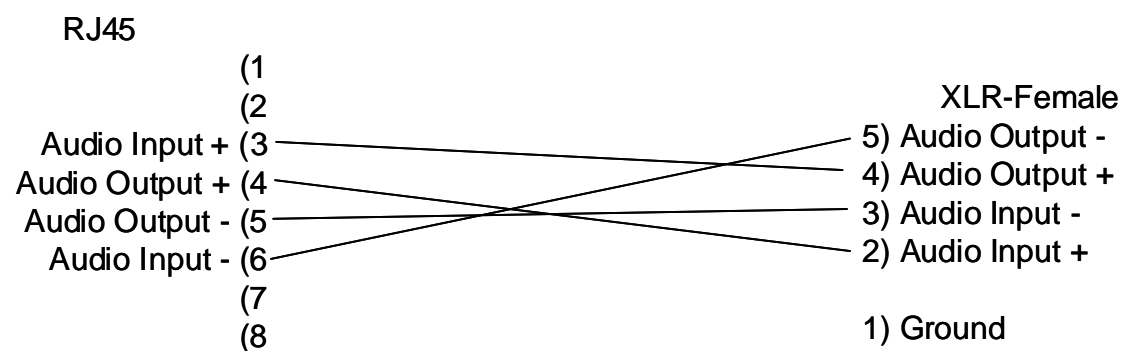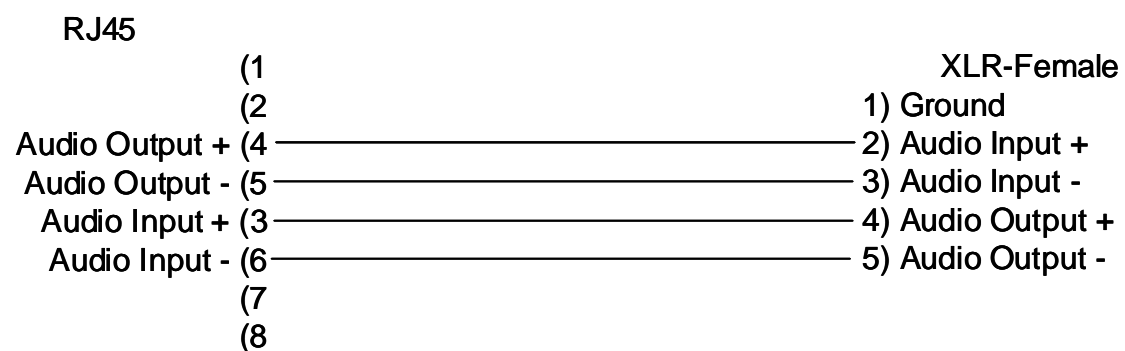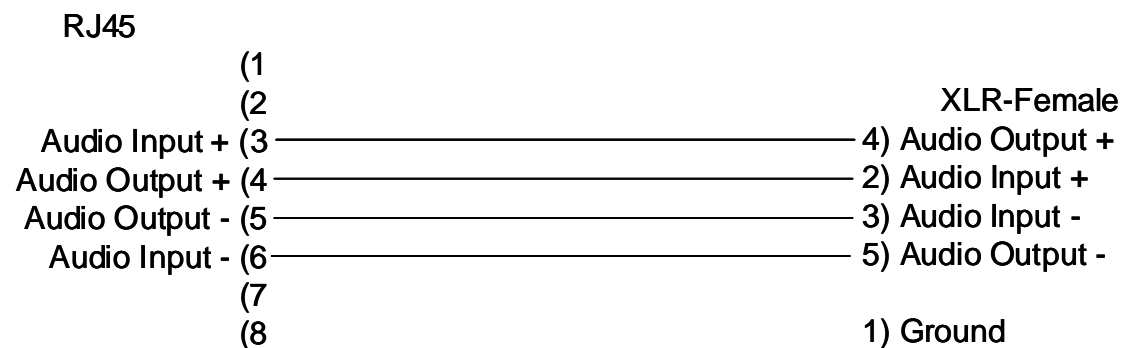


RJ45	Color	Signal
Pin 1	O/W	RS-422 RX
Pin 2	O	RS-422 RX
Pin 3	G/W	Intercom RX +
Pin 4	B	Intercom TX +
Pin 5	B/W	Intercom TX -
Pin 6	G	Intercom RX -
Pin 7	B/W	RS-422 TX
Pin 8	B	RS-422 TX

4-Wire Intercom				
	Pin	Function	Impedance	Signal
<p>ADAP 6 Base Station #20 & #21 XLR5 Male</p>	1	Ground		
	2	+ Input	600 Ohm Input	Line: +8 dBm
	3	- Input		Mic: -32 dBm
	4	+ Output	>=600 Ohm Load	+8 dBm
	5	- Output		

A3

NOT TO SCALE



3rd ANGLE

DRAWN BY: Jonathan Sorensen



Clear-Com, LLC
1301 Marina Village Parkway, Suite 105
Alameda, California 94501
United States
Tel: +1.510.337.6600 or 1.800.462.HELP (4357)
Fax: +1.510.337.6699
Email: SalesSupportUS@clearcom.com

FILE LOCATION: Not specified

TITLE: **Clear-Com 4-Wire**
To Grass Valley CopperHead 3404 Base 5pin XLR

DATE: 02/13/2019

ISSUE: v1.0

This drawing/specification is the property of Clear-Com LLC and may not be reproduced or disclosed to a third party in any form without the written permission of the company