


3-pin XLR patch cable from SB-704 / MS-704 to EF-701M interface

EF-701M RJ45 jack

- RS-422 Send +
- RS-422 Send -
- Audio Send +
- Audio Receive +
- Audio Receive -
- Audio Send -
- RS-422 Receive +
- RS-422 Receive -

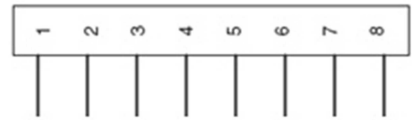

- RS-422 Receive +
- RS-422 Receive -
- Audio Receive +
- Audio Send +
- Audio Send -
- Audio Receive -
- RS-422 Send +
- RS-422 Send -

Voice 2 "To Panel" RJ45 jack

Use the "To Panel" RJ45 jack on the Voice panels at the local and remote locations. This will allow for the use of a standard CAT-5 patch cable From each EF-701M to Voice 2 unit



TITLE: Two PL systems linked by Voice 2s