


Audio Out (-)

Audio In (+)Audio In (-)




DB-9M Connector

Caution: Shielded Cable Requirement Shielded Cable is required for ALL LQ SERIES GPIO Port connectivity. Shielded Cable must be used to assure compliance with domestic and international emissions standards.

We always advise to read your 3rd party product manual for connecting to this product

Pin	Function
1	Audio Line Output (+)
6	Audio Line Output (-)
2	Audio Line Input (+)
7	Audio Line Input (-)
3	Ground
8	GPI (Short GPI to Ground to activate)
4	Relay (GPO) -normally Closed
9	Relay (GPO) -Common (relay wiper)
5	Relay (GPO) -normally Open

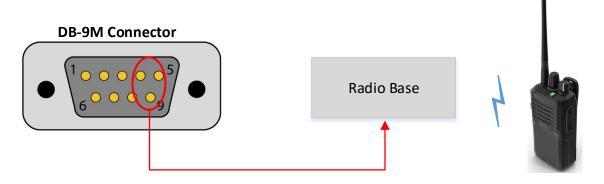

Two-Way Radio Example

This drawing/specification is the property of Clear-Com LLC and may not be reproduced or disclosed to a third party in any form without the written permission of the company

