

# DESCRIPTION OF INTERNAL JUMPER OPTIONS AND ADJUSTMENTS

The AB-120 has internal jumper options, connector selectable microphone output levels, dip switch selection of ear phone output, and headphone sidetone adjustment controls.

As shipped from the factory, the AB-120 has its internal jumpers and dip switches set to implement the Clear-Com party-line as described in its respective section.

The unit is setup for sportscaster mode, option and the mic output level is set for -10 dBu. The unit will operate on power from the intercom line or from the external DC supply.

All of these jumpers and settings may need to be set depending on the application of the unit.

To gain access to the internal options, remove the bottom cover by unscrewing the four rubber feet. There is a diagram showing the switch settings and jumper options attached to the inside of the bottom cover.

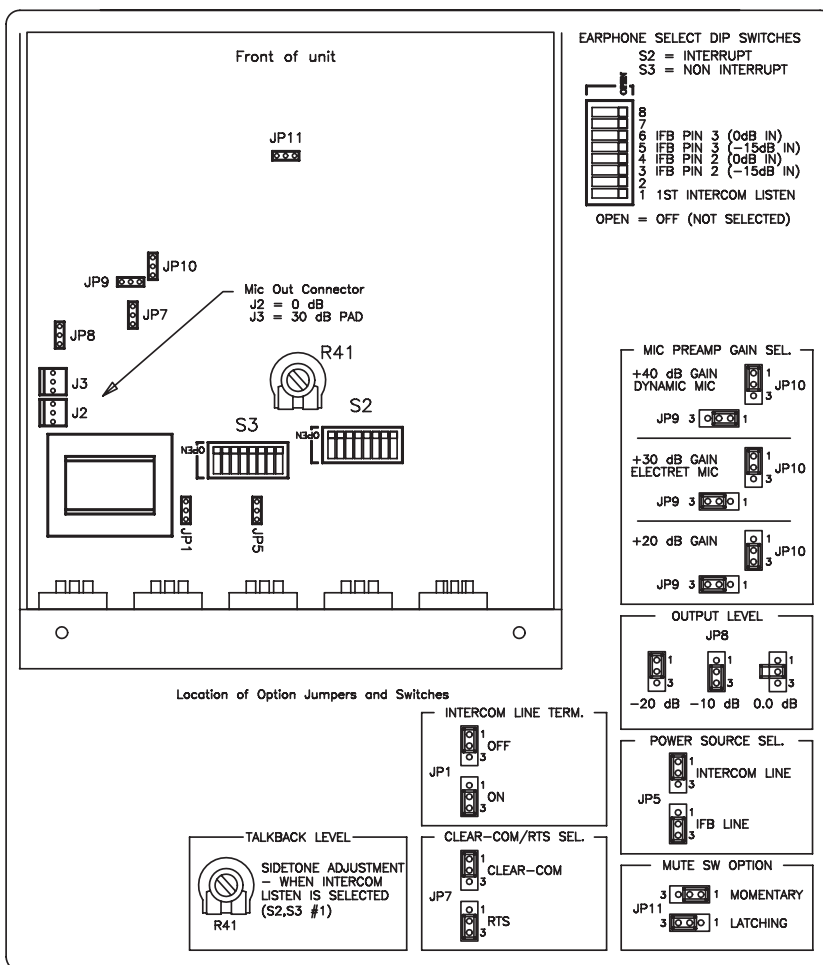


Figure 1-4: AB-120 Internal Options Diagram